




2025 New Lineup Of Underwater Connectors

TC (Tiny Series), ETLPMIL/BH




ETLPMIL/BH

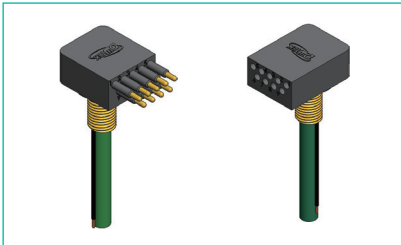

[Click the pictures to visit the product pages](#)

Bulkhead


- ✓ Contact: 9
- ✓ 600 V DC/AC rms(Voltage rating)
- ✓ 250 V DC/AC rms(Voltage rating on data wire)
- ✓ 4 A per contact (max 16 A per connector)
- ✓ Data rate >1 Gbit/s (up to 75m)
- ✓ 600 Bar, -40 to 60°C

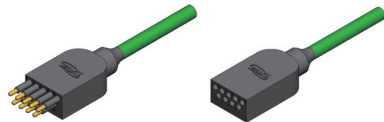

Inline

- ✓ Contact: 9
- ✓ 600 V DC/AC rms(Voltage rating)
- ✓ 250 V DC/AC rms(Voltage rating on data wire)
- ✓ 4 A per contact (max 16 A per connector)
- ✓ Data rate >1 Gbit/s (up to 75m)
- ✓ 600 Bar, -40 to 60°C

TC (Tiny Series)



Bulkhead

- ✓ Contact: 4, 7
- ✓ 600 V DC, 600 Bar, -40 to 60°C



Inline

- ✓ Contact: 4, 7
- ✓ 600 V DC, 600 Bar, -40 to 60°C




2025 New Lineup Of Underwater Connectors

5515 Series



5515 Series




FCR (Flange connector receptable)

- ✓ Contact: 8
- ✓ 600 V DC, 600 Bar, -40 to 60°C



BCR (Bulkhead connector receptable)

- ✓ Contact: 8
- ✓ 600 V DC, 600 Bar, -40 to 60°C



CCP/AT (Cable connector plug / Attachable)

- ✓ Contact: 8
- ✓ 600 V DC, 600 Bar, -40 to 60°C



CCR (Cable connector receptacle)

- ✓ Contact: 8
- ✓ 600 V DC, 600 Bar, -40 to 60°C



CCP (Cable connector plug)

- ✓ Contact: 8
- ✓ 600 V DC, 600 Bar, -40 to 60°C



Dummy

- ✓ Contact: 8




2025 New Lineup Of Underwater Connectors

SC25 FIA Series



SC25




Bulkhead

- ✓ Contact: 25
- ✓ 600 V DC, 600 Bar, -40 to 60°C



Inline

- ✓ Contact: 25
- ✓ 600 V DC, 600 Bar, -40 to 60°C

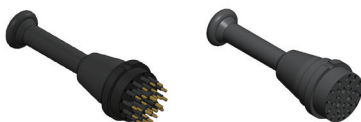

Dummy


- ✓ Contact: 25

FIA



Inline

- ✓ Contact: 4
- ✓ 600 V DC, 600 Bar, -40 to 60°C

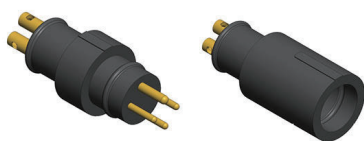

Overmold

- ✓ Contact: 4
- ✓ 600 V DC, 600 Bar, -40 to 60°C



Overmold Boot




2025 New Lineup Of Underwater Connectors

LPMC9




LPMC9



Bulkhead

- ✓ Contact: 9
- ✓ 300 V DC, 600 Bar(300 bar for PEEK), -40 to 60°C

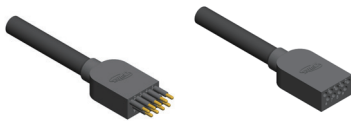

Inline

- ✓ Contact: 9
- ✓ 300 V DC, 600 Bar, -40 to 60°C



Dummy

- ✓ Contact: 9